


Packaging Information


Item Code	Item Description	Dimensions(mm)(LxWxH)	Packaging Unit(Pcs/Unit)	Gross Weight(kg)	Packing Qty(Pcs/CTN)
70900015500	LED Solarflood-E2 100W-6500K-WH-GP-DZ	410*140*410MM	3.6		1
70900015600	LED Solarflood-E2 200W-6500K-WH-GP-DZ	410*150*590MM	5		1
70900015700	LED Solarflood-E2 300W-6500K-WH-GP-DZ	410*140*660MM	6.1		1

Dimensional Drawing

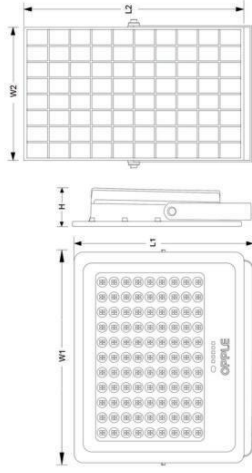

Mode	W1(mm)	L1(mm)	H(mm)	W2(mm)	L2(mm)
SFL-E2 100W	200	184	55	350	350
SFL-E2 200W	302	252	55	350	530
SFL-E2 300W	377	283	55	350	600

Photometric Data

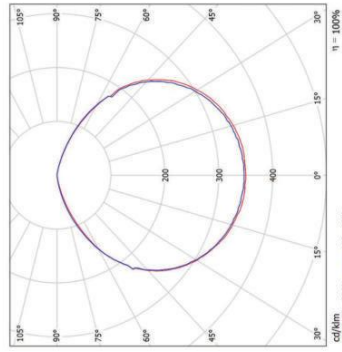

1200



LED Outdoor Wall Washer P2 & P3



Application

Specification

Item Code	Item Description	Power (W)	CCT (K)	Lumen (lm)	Rated Input Voltage (V DC)	Beam Angle (°)	Lifes Time (L70B50)	MOQ (pcs)
714001005800	LXQ-A01Com-6W300MM20x40D30K24V-OF	6	3000	360	24	20+40	30000	200
714001005900	LXQ-A01Com-6W300MM20x40D40K24V-OF	6	4000	360	24	20+40	30000	200
714001006500	LXQ-A01Com-9W300MM20x40D30K24V-OF	9	3000	540	24	20+40	30000	200
714001006900	LXQ-A01Com-9W300MM20x40D40K24V-OF	9	4000	540	24	20+40	30000	200
714001006000	LXQ-A01Com-9W500MM20x40D30K24V-OF	9	3000	540	24	20+40	30000	200
714001006100	LXQ-A01Com-9W500MM20x40D40K24V-OF	9	4000	540	24	20+40	30000	200
714001006400	LXQ-A01Com-12W500MM20x40D30K24V-OF	12	3000	720	24	20+40	30000	200
714001006500	LXQ-A01Com-12W500MM20x40D40K24V-OF	12	4000	720	24	20+40	30000	200
714001007000	LXQ-A01Com-18W500MM20x40D30K24V-OF	18	3000	1080	24	20+40	30000	200
714001007100	LXQ-A01Com-18W500MM20x40D40K24V-OF	18	4000	1080	24	20+40	30000	200
714001006200	LXQ-A01Com-18W1000MM20x40D30K24V-OF	18	3000	1080	24	20+40	30000	200
714001006300	LXQ-A01Com-18W1000MM20x40D40K24V-OF	18	4000	1080	24	20+40	30000	200
714001006600	LXQ-A01Com-24W1000MM20x40D30K24V-OF	24	3000	1440	24	20+40	30000	200
714001006700	LXQ-A01Com-24W1000MM20x40D40K24V-OF	24	4000	1440	24	20+40	30000	200
714001007200	LXQ-A01Com-36W1000MM20x40D30K24V-OF	36	3000	2160	24	20+40	30000	200
714001007300	LXQ-A01Com-36W1000MM20x40D40K24V-OF	36	4000	2160	24	20+40	30000	200
714001016010	LED Wallwasher-PH L300 6W-RGB-15+30D-GY-GP	6	RGB	360	24	15+30	30000	200
714001015910	LED Wallwasher-PH L500 9W-RGB-15+30D-GY-GP	9	RGB	540	24	15+30	30000	200
714001015810	LED Wallwasher-PH L500 12W-RGB-15+30D-GY-GP	12	RGB	720	24	15+30	30000	200
714001015710	LED Wallwasher-PH L500 18W-RGB-15+30D-GY-GP	18	RGB	1080	24	15+30	30000	200
714001015610	LED Wallwasher-PH L1000 18W-RGB-15+30D-GY-GP	18	RGB	1080	24	15+30	30000	200
714001015510	LED Wallwasher-PH L1000 24W-RGB-15+30D-GY-GP	24	RGB	1440	24	15+30	30000	200
714001015410	LED Wallwasher-PH L1000 36W-RGB-15+30D-GY-GP	36	RGB	2160	24	15+30	30000	200

Technical Specifications	
CRI	>=80(3000K/4000K)
Colour Consistency(SDCM)	<7
Dimmable	No(3000K/4000K) Yes(RGB)
Dimming Control Method	DMX 512(RGB)
Housing Colour	Grey
IP	IP65
IK	IK06
Beam Angle	20°~40°(3000K/4000K) 15°~30°(RGB)
Glow wire test	650°C
Weight	0.36kg/0.3m/0.53kg/0.5m/0.98kg/1m(3000K/4000K) 0.55kg/0.3m/0.85kg/0.5m/1.6kg/1m(RGB)

Packaging Information

Item Code	Item Description	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Outer box Packing Qty (pcs/Unit)
714001005800	LXQ-A01Com-6W3000MM20x40D30K24V-OF	630*235*230	12.27	32
714001005900	LXQ-A01Com-6W3000MM20x40D40K24V-OF	630*235*230	12.27	32
714001006800	LXQ-A01Com-9W3000MM20x40D30K24V-OF	630*235*230	12.27	32
714001006900	LXQ-A01Com-9W3000MM20x40D40K24V-OF	630*235*230	12.27	32
714001006000	LXQ-A01Com-9W5000MM20x40D30K24V-OF	530*235*230	9.23	16
714001006100	LXQ-A01Com-9W5000MM20x40D40K24V-OF	530*235*230	9.23	16
714001006400	LXQ-A01Com-12W5000MM20x40D30K24V-OF	530*235*230	9.23	16
714001006500	LXQ-A01Com-12W5000MM20x40D40K24V-OF	530*235*230	9.23	16
714001007000	LXQ-A01Com-18W5000MM20x40D30K24V-OF	530*235*230	9.23	16
714001007100	LXQ-A01Com-18W5000MM20x40D40K24V-OF	530*235*230	9.23	16
714001006200	LXQ-A01Com-18W1000MM20x40D30K24V-OF	1030*235*230	16.59	16
714001006300	LXQ-A01Com-18W1000MM20x40D40K24V-OF	1030*235*230	16.59	16
714001006600	LXQ-A01Com-24W1000MM20x40D30K24V-OF	1030*235*230	16.59	16
714001006700	LXQ-A01Com-24W1000MM20x40D40K24V-OF	1030*235*230	16.59	16
714001007200	LXQ-A01Com-36W1000MM20x40D30K24V-OF	1030*235*230	16.59	16
714001007300	LXQ-A01Com-36W1000MM20x40D40K24V-OF	1030*235*230	16.59	16
714001016010	LED Wallwasher-PH L300 6W-RGB-15+30D-GY-GP	660*275*170	9.55	16
714001015910	LED Wallwasher-PH L500 9W-RGB-15+30D-GY-GP	530*340*245	13.50	15
714001015810	LED Wallwasher-PH L500 12W-RGB-15+30D-GY-GP	530*340*245	13.50	15
714001015710	LED Wallwasher-PH L500 18W-RGB-15+30D-GY-GP	530*340*245	13.50	15
714001015610	LED Wallwasher-PH L1000 18W-RGB-15+30D-GY-GP	1030*275*175	13.55	8
714001015510	LED Wallwasher-PH L1000 24W-RGB-15+30D-GY-GP	1030*275*175	13.55	8
714001015410	LED Wallwasher-PH L1000 36W-RGB-15+30D-GY-GP	1030*275*175	13.55	8


Installation Accessory

Item Code	Item Description	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Outer box Packing Qty (pcs/Unit)
714098002310	R-2pin-powerscable2*1mm2-500mm	530*340*245	20.80	400
543098027210	LED Wallwasher-PH T-shape power cable	1030*400*200	20.80	200
714098002210	R-5pin-TreeC2*1.5+2*0.75+3*0.5mm2-300mm	530*340*245	15.80	150
714098002010	R-5pin-powerscable2*0.75+3*0.5mm2-500mm	530*340*245	12.80	400
714098002110	R-5pin-linkcable2*0.75+3*0.5mm2-180mm	530*340*245	20.80	400

Controller Accessory

Item Code	Item Description	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Outer box Packing Qty (pcs/Unit)
821001001010	Sub controller-MR-8FT28-DMA512	480*148*230	15.00	10
4010010056000	LED Powersupply-MW-ELG-75W-24V-IP67	360*250*220	13.50	9
4010010055000	LED Powersupply-MW-ELG-150W-24V-IP67	360*290*210	16.00	16
4010010054000	LED Powersupply-MW-ELG-300W-24V-IP67	340*320*210	5.00	9

Dimensional Drawing

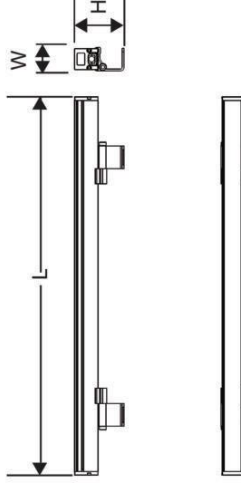

Single Color Series

Model	L (mm)	W (mm)	H (mm)
LXQ02300602A01Com	300	31	65.5
LXQ02300902A01Com	300	31	65.5
LXQ02500902A01Com	500	31	65.5
LXQ025001202A01Com	500	31	65.5
LXQ025001802A01Com	500	31	65.5
LXQ0210001802A01Com	1000	31	65.5
LXQ0210002402A01Com	1000	31	65.5
LXQ0210003602A01Com	1000	31	65.5

RGB Series

Model	L (mm)	W (mm)	H (mm)
LED WW-P2 L300	300	43	85
LED WW-P2 L500	500	43	85
LED WW-P2 L1000	1000	43	85